

Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 60598-2-2**  
**Luminaires**  
**Part 2: Particular requirements**  
**Section 2: Recessed luminaires**

**Report Number**..... : 200714072GZU-002

**Date of issue**..... : 13 Oct. 2020

**Total number of pages** ..... : 44

**Name of Testing Laboratory preparing the Report** ..... : Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

**Applicant's name** ..... : Rise Lighting Co., Ltd.

**Address**..... : JlinHe Road NO.591 HongQi Town JinWan District ZhuHai City, GuangDong, China

**Test specification:**

**Standard** ..... : IEC 60598-2-2:2011 used in conjunction with IEC 60598-1:2014, AMD1:2017

**Test procedure**..... : Test report

**Non-standard test method**..... : N/A

**Test Report Form No.** ..... : IEC60598\_2\_2F

**Test Report Form(s) Originator**.... : Intertek Semko AB

**Master TRF** ..... : Dated 2017-12-21

**Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

|                                      |  |
|--------------------------------------|--|
| <b>Test item description</b> ..... : | Recessed luminaire with LED (Air cleaner fixed luminaire)  |
| <b>Trade Mark</b> ..... :            | —  |
| <b>Manufacturer</b> .....            | Same as applicant  |
| <b>Model/Type reference</b> ..... :  | 2018.126; 2018.135;  |
| <b>Ratings</b> ..... :               | Constant voltage 24 VDC; Max. 2,1 A; Class III; IP20;<br>Max. 33 W non replaceable LED module;<br>Max. 1,2 W non replaceable UV module;<br>Suitable for direct mounting on normally flammable surfaces;<br>Not suitable for covered by thermal insulated material. |

|   |                               |   |
|---|-------------------------------|---|
| <b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b> |                               |   |
| <input checked="" type="checkbox"/>   | <b>CB Testing Laboratory:</b> | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch  |
| <b>Testing location/ address .....</b>  |                               | Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China |
| <b>Tested by (name, function, signature).....</b>   |                               | Nathan Cai / Engineer                                    |
| <b>Approved by (name, function, signature) ..</b>   |                               | Wells Fang / Sr. Project Engineer                        |
| <b>Testing procedure: CTF Stage 1:</b>  |                               |   |
| <b>Testing location/ address .....</b>  |                               |   |
| <b>Tested by (name, function, signature).....</b>   |                               | --  |
| <b>Approved by (name, function, signature) ..</b>   |                               | --  |
| <b>Testing procedure: CTF Stage 2:</b>  |                               |   |
| <b>Testing location/ address .....</b>  |                               |   |
| <b>Tested by (name + signature).....</b>  |                               | --  |
| <b>Witnessed by (name, function, signature) . :</b>   |                               | --  |
| <b>Approved by (name, function, signature) ..</b>   |                               | --  |
| <b>Testing procedure: CTF Stage 3:</b>  |                               |   |
| <b>Testing procedure: CTF Stage 4:</b>  |                               |   |
| <b>Testing location/ address .....</b>  |                               |   |
| <b>Tested by (name, function, signature).....</b>   |                               | --  |
| <b>Witnessed by (name, function, signature) . :</b>   |                               | --  |
| <b>Approved by (name, function, signature) ..</b>   |                               | --  |
| <b>Supervised by (name, function, signature) :</b>  |                               | --  |

**List of Attachments (including a total number of pages in each attachment):**

This test report is totally 44 pages. Pages 1-36 are test report, pages 37-44 are product photos.

**Summary of testing:**

The submitted samples are fulfilled the requirements of specified standard as following:

- 1) IEC 60598-2-2: 2011 used in conjunction with IEC 60598-1: 2014 +A1: 2017;
- 2) EN 60598-2-2: 2012 used in conjunction with EN 60598-1: 2015+A1: 2018;
- 3) Additional requirement of IEC 60598-2-1: 1979+A1: 1987 and EN 60598-2-1: 1989;
- 4) Additional requirement of IEC 60598-2-1: 2020 and EN 60598-2-1: 1989;
- 5) Additional requirements of IEC 62031: 2018 and EN IEC 62031: 2020;
- 6) Requirement of photobiological safety of lamps and lamp systems has been considered according to the standard IEC 62471: 2006 and EN 62471:2008. The product was belonging to "Exempt group".  
For the blue light hazard required by IEC TR 62778:2014, the products were tested and met "Exempt group", so the products don't need to mark  $E_{thr}$ .
- 7) Additional requirement for Control panel had been considered on test report 200715106GZU-001.

Totally 2 models; model 2018.135 was selected to do full test; model 2018.126 was selected to do deviation test.

This test report must be used with report No. 200715106GZU-001.

**Tests performed (name of test and test clause):**

All applicable clauses

**Testing location:**

Intertek Testing Services Shenzhen Ltd.  
Guangzhou Branch

Room 02, &  
101/E201/E301/E401/E501/E601/E701/E801 of  
Room 01 1-8/F., No. 7-2. Caipin Road, Science  
City, GETDD, Guangzhou, Guangdong, China


**Summary of compliance with National Differences:**

See Annex ZB and ZC.

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Representative**

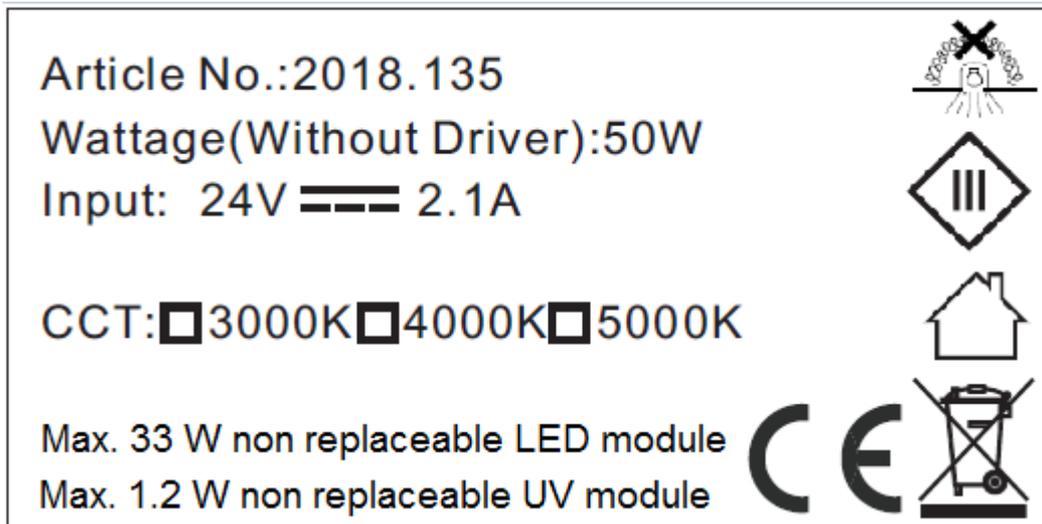

Location: printed on external surface of LED luminaire; visible during installation

**Remark on above marking:**

- 1, The height of graphical symbols except “” shall not be less than 5 mm;
- 2, The height of letters and numerals shall be not less than 2 mm;

3. The symbol “” shall be at least 25 mm for each side;

4. The symbol “” shall not be less than 7 mm.

|  |  |
|--|--|
| <b>Test item particulars</b> ..... :   |  |
| <b>Classification of installation and use</b> ..... : Class III recessed luminaire   |  |
| <b>Supply Connection</b> ..... : Terminal block  |  |
| <b>Possible test case verdicts:</b>  |  |
| - test case does not apply to the test object..... : N/A   |  |
| - test object does meet the requirement..... : P (Pass)  |  |
| - test object does not meet the requirement..... : F (Fail)  |  |
| <b>Testing</b> ..... :   |  |
| <b>Date of receipt of test item</b> ..... : 14 July 2020   |  |
| <b>Date (s) of performance of tests</b> ..... : 14 July 2020 to 13 Oct. 2020   |  |
|  |  |
| <b>General remarks:</b>  |  |
| <p>"(See Enclosure #)" refers to additional information appended to the report.<br/>         "(See appended table)" refers to a table appended to the report.<br/> <b>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</b></p> <p>Clause numbers between brackets refer to clauses in IEC 60598-1.<br/>         When determining for test conclusion, measurement uncertainty of tests has been considered.<br/>         This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.<br/>         The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.<br/>         The clause which indicated with * is the subcontract test item.</p> |  |
| <b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 02:</b>  |  |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :  | <input type="checkbox"/> <b>Yes</b><br><input checked="" type="checkbox"/> <b>Not applicable</b> |
| <b>When differences exist; they shall be identified in the General product information section.</b>  |  |
| <b>Name and address of factory (ies)</b> ..... : Same as applicant   |  |

**General product information:**

Product covered by this report is class III recessed LED luminaire for indoor use only, integral in a fixed air cleaner.

The product provided two installation method, recessed mounting and ceiling mounting.

| Model name | Size            |
|------------|-----------------|
| 2018.126   | 600 mm x 600 mm |
| 2018.135   | 595 mm x 595 mm |

Both models are the same as each other except the size.

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

| 2.3 (0)     | GENERAL TEST REQUIREMENTS                                   |  | — |
|-------------|---|--|---|
| 2.3 (0.3)   | More sections applicable..... :                             | Yes <input checked="" type="checkbox"/> No <input type="checkbox"/><br>Section/s: IEC/EN 60598-2-1 | — |
| 2.3 (0.5)   | Components  | (see Annex 1)  | — |
| 2.3 (0.7)   | Information for luminaire design in light sources standards |  | — |
| 2.3 (0.7.2) | Light source safety standard .....                          | IEC/EN 62031;<br>Clause 32.102 of IEC 60335-2-65   | — |
|             | Luminaire design in the light source safety standard        |  | P |

| 2.5 (2)   | CLASSIFICATION OF LUMINAIRES   |   | — |
|-----------|--|---|---|
| 2.5 (2.2) | Type of protection .....   | Class III   | — |
| 2.5 (2.3) | Degree of protection .....   | IP20  | — |
| 2.5 (2.4) | Luminaire suitable for direct mounting on normally flammable surfaces..... : | Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> | — |
| 2.5 (2.5) | Luminaire for normal use .....   | Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> | — |
|           | Luminaire for rough service .....  | Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> | — |

| 2.6 (3)      | MARKING                               |         | P   |
|--------------|---------------------------------------|---------|-----|
| 2.6 (3.2)    | Mandatory markings                    |         | P   |
|              | Position of the marking               |         | P   |
|              | Format of symbols/text                |         | P   |
| 2.6 (3.3)    | Additional information                |         | P   |
|              | Language of instructions              | English | P   |
| 2.6 (3.3.1)  | Combination luminaires                |         | N/A |
| 2.6 (3.3.2)  | Nominal frequency in Hz               |         | N/A |
| 2.6 (3.3.3)  | Operating temperature                 |         | N/A |
| 2.6 (3.3.5)  | Wiring diagram                        |         | N/A |
| 2.6 (3.3.6)  | Special conditions                    |         | N/A |
| 2.6 (3.3.7)  | Metal halide lamp luminaire – warning |         | N/A |
| 2.6 (3.3.8)  | Limitation for semi-luminaires        |         | N/A |
| 2.6 (3.3.9)  | Power factor and supply current       |         | N/A |
| 2.6 (3.3.10) | Suitability for use indoors           |         | N/A |
| 2.6 (3.3.11) | Luminaires with remote control        |         | N/A |
| 2.6 (3.3.12) | Clip-mounted luminaire – warning      |         | N/A |
| 2.6 (3.3.13) | Specifications of protective shields  |         | N/A |
| 2.6 (3.3.14) | Symbol for nature of supply           |         | N/A |

| IEC 60598-2-2 |  |                            |         |
|---------------|--|----------------------------|---------|
| Clause        | Requirement + Test   | Result - Remark            | Verdict |
| 2.6 (3.3.15)  | Rated current of socket outlet   |                            | N/A     |
| 2.6 (3.3.16)  | Rough service luminaire  |                            | N/A     |
| 2.6 (3.3.17)  | Mounting instruction for type Y, type Z and some type X attachments                                      |                            | N/A     |
| 2.6 (3.3.18)  | Non-ordinary luminaires with PVC cable   |                            | N/A     |
| 2.6 (3.3.19)  | Protective conductor current in instruction if applicable  |                            | N/A     |
| 2.6 (3.3.20)  | Provided with information if not intended to be mounted within arm's reach                               |                            | N/A     |
| 2.6 (3.3.21)  | Non-replaceable and non-user replaceable light sources information provided                              | Non replaceable LED module | P       |
| 2.6 (3.3.22)  | Controllable luminaires, classification of insulation provided   |                            | N/A     |
| 2.6 (3.3.23)  | Luminaire without controlgear provided with necessary information for selection of appropriate component |                            | N/A     |
| 2.6 (3.3.24)  | If not supplied with terminal block, information on the packaging  |                            | N/A     |
| 2.6 (3.4)     | Test with water  |                            | P       |
|               | Test with hexane   |                            | P       |
|               | Legible after test   |                            | P       |
|               | Label attached   |                            | P       |

|                  |  |  |     |
|------------------|--|--|-----|
| <b>2.7 (4)</b>   | <b>CONSTRUCTION</b>  |  | P   |
| 2.7 (4.2)        | Components replaceable without difficulty  |  | P   |
| 2.7 (4.3)        | Wireways smooth and free from sharp edges  |  | P   |
| <b>2.7 (4.4)</b> | <b>Lampholders</b>   |  | N/A |
| 2.7 (4.4.1)      | Integral lampholder  |  | N/A |
| 2.7 (4.4.2)      | Wiring connection  |  | N/A |
| 2.7 (4.4.3)      | Lampholder for end-to-end mounting   |  | N/A |
| 2.7 (4.4.4)      | Positioning  |  | N/A |
|                  | - pressure test (N) .....  |  | —   |
|                  | After test the lampholder comply with relevant standard sheets and show no damage  |  | N/A |
|                  | After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation |  | N/A |
|                  | - bending test (N) .....   |  | —   |
|                  | After test the lampholder have not moved from its position and show no permanent deformation                             |  | N/A |

| IEC 60598-2-2    |   |                 |          |
|------------------|---|-----------------|----------|
| Clause           | Requirement + Test  | Result - Remark | Verdict  |
| 2.7 (4.4.5)      | Peak pulse voltage  |                 | N/A      |
| 2.7 (4.4.6)      | Centre contact  |                 | N/A      |
| 2.7 (4.4.7)      | Parts in rough service luminaires resistant to tracking                                 |                 | N/A      |
| 2.7 (4.4.8)      | Lamp connectors   |                 | N/A      |
| 2.7 (4.4.9)      | Caps and bases correctly used   |                 | N/A      |
| 2.7 (4.4.10)     | Light source for lampholder or connection according IEC 60061 not connected another way |                 | N/A      |
| <b>2.7 (4.5)</b> | <b>Starter holders</b>  |                 | N/A      |
|                  | Starter holder in luminaires other than class II  |                 | N/A      |
|                  | Starter holder class II construction  |                 | N/A      |
| <b>2.7 (4.6)</b> | <b>Terminal blocks</b>  |                 | P        |
|                  | Tails   |                 | P        |
|                  | Unsecured blocks  |                 | N/A      |
| <b>2.7 (4.7)</b> | <b>Terminals and supply connections</b>   |                 | <b>P</b> |
| 2.7 (4.7.1)      | Contact to metal parts  |                 | P        |
| 2.7 (4.7.2)      | Test 8 mm live conductor  |                 | P        |
|                  | Test 8 mm earth conductor   |                 | N/A      |
| 2.7 (4.7.3)      | Terminals for supply conductors   |                 | P        |
| 2.7 (4.7.3.1)    | Welded method and material  |                 | N/A      |
|                  | - stranded or solid conductor   |                 | N/A      |
|                  | - spot welding  |                 | N/A      |
|                  | - welding between wires   |                 | N/A      |
|                  | - Type Z attachment   |                 | N/A      |
|                  | - mechanical test according to 15.6.2   |                 | N/A      |
|                  | - electrical test according to 15.6.3   |                 | N/A      |
|                  | - heat test according to 15.6.3.2.3 and 15.6.3.2.4                                      |                 | N/A      |
| 2.7 (4.7.4)      | Terminals other than supply connection  |                 | N/A      |
| 2.7 (4.7.5)      | Heat-resistant wiring/sleeves   |                 | N/A      |
| 2.7 (4.7.6)      | Multi-pole plug   |                 | N/A      |
|                  | - test at 30 N  |                 | N/A      |
| <b>2.7 (4.8)</b> | <b>Switches</b>   |                 | N/A      |
|                  | - adequate rating   |                 | N/A      |
|                  | - adequate fixing   |                 | N/A      |
|                  | - polarized supply  |                 | N/A      |
|                  | - compliance with IEC 61058-1 for electronic switches                                   |                 | N/A      |
| <b>2.7 (4.9)</b> | <b>Insulating lining and sleeves</b>  |                 | N/A      |

| IEC 60598-2-2     |  |                 |          |
|-------------------|--|-----------------|----------|
| Clause            | Requirement + Test   | Result - Remark | Verdict  |
| 2.7 (4.9.1)       | Retention  |                 | N/A      |
|                   | Method of fixing .....   |                 | N/A      |
| 2.7 (4.9.2)       | Insulated linings and sleeves:   |                 | N/A      |
|                   | Resistant to a temperature > 20 °C to the wire temperature or  |                 | N/A      |
|                   | a) & c) Insulation resistance and electric strength  |                 | N/A      |
|                   | b) Ageing test. Temperature (°C).....  |                 | N/A      |
| <b>2.7 (4.10)</b> | <b>Double or reinforced insulation</b>   |                 | N/A      |
| 2.7 (4.10.1)      | No contact, mounting surface – accessible metal parts – wiring of basic insulation   |                 | N/A      |
|                   | Safe installation fixed luminaires   |                 | N/A      |
|                   | Capacitors and switches  |                 | N/A      |
|                   | Interference suppression capacitors according to IEC 60384-14  |                 | N/A      |
| 2.7 (4.10.2)      | Assembly gaps:   |                 | N/A      |
|                   | - not coincidental   |                 | N/A      |
|                   | - no straight access with test probe   |                 | N/A      |
| 2.7 (4.10.3)      | Retention of insulation:   |                 | N/A      |
|                   | - fixed  |                 | N/A      |
|                   | - unable to be replaced; luminaire inoperative   |                 | N/A      |
|                   | - sleeves retained in position   |                 | N/A      |
|                   | - lining in lampholder   |                 | N/A      |
| 2.7 (4.10.4)      | Protective impedance device  |                 | N/A      |
|                   | Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor |                 | N/A      |
|                   | Y1 or Y2 capacitors comply with IEC 60384-14   |                 | N/A      |
|                   | Resistors comply with test (a) in 14.1 of IEC 60065  |                 | N/A      |
| <b>2.7 (4.11)</b> | <b>Electrical connections and current-carrying parts</b>   |                 | <b>P</b> |
| 2.7 (4.11.1)      | Contact pressure   |                 | P        |
| 2.7 (4.11.2)      | Screws:  |                 | N/A      |
|                   | - self-tapping screws  |                 | N/A      |
|                   | - thread-cutting screws  |                 | N/A      |
| 2.7 (4.11.3)      | Screw locking:   |                 | N/A      |
|                   | - spring washer  |                 | N/A      |
|                   | - rivets   |                 | N/A      |
| 2.7 (4.11.4)      | Material of current-carrying parts   |                 | P        |

| IEC 60598-2-2     |   |                                |          |
|-------------------|---|--------------------------------|----------|
| Clause            | Requirement + Test  | Result - Remark                | Verdict  |
| 2.7 (4.11.5)      | No contact to wood or mounting surface                              |                                | P        |
| 2.7 (4.11.6)      | Electro-mechanical contact systems                                  |                                | N/A      |
| <b>2.7 (4.12)</b> | <b>Screws and connections (mechanical) and glands</b>               |                                | <b>P</b> |
| 2.7 (4.12.1)      | Screws not made of soft metal                                       |                                | P        |
|                   | Screws of insulating material                                       |                                | N/A      |
|                   | Torque test: torque (Nm); part ..... :                              | Plastic cord anchorage; 0,5 Nm | P        |
|                   | Torque test: torque (Nm); part ..... :                              |                                | N/A      |
|                   | Torque test: torque (Nm); part ..... :                              |                                | N/A      |
| 2.7 (4.12.2)      | Screws with diameter < 3 mm screwed into metal                      |                                | N/A      |
| 2.7 (4.12.4)      | Locked connections:   |                                | N/A      |
|                   | - fixed arms; torque (Nm) ..... :                                   |                                | N/A      |
|                   | - lampholder; torque (Nm)..... :                                    |                                | N/A      |
|                   | - push-button switches; torque 0,8 Nm ..... :                       |                                | N/A      |
| 2.7 (4.12.5)      | Screwed glands; force (Nm) ..... :                                  |                                | N/A      |
| <b>2.7 (4.13)</b> | <b>Mechanical strength</b>  |                                | <b>P</b> |
| 2.7 (4.13.1)      | Impact tests:   |                                | P        |
|                   | - fragile parts; energy (Nm) ..... :                                |                                | N/A      |
|                   | - other parts; energy (Nm)..... :                                   | Enclosure/lens: 0,35 Nm        | P        |
|                   | 1) live parts   |                                | N/A      |
|                   | 2) linings  |                                | N/A      |
|                   | 3) protection   |                                | P        |
|                   | 4) covers   |                                | P        |
| 2.7 (4.13.2)      | Metal parts have adequate mechanical strength                       |                                | P        |
| 2.7 (4.13.3)      | Straight test finger  |                                | N/A      |
| 2.7 (4.13.4)      | Rough service luminaires  |                                | N/A      |
|                   | - IP54 or higher  |                                | N/A      |
|                   | a) fixed  |                                | N/A      |
|                   | b) hand-held  |                                | N/A      |
|                   | c) delivered with a stand   |                                | N/A      |
|                   | d) for temporary installations and suitable for mounting on a stand |                                | N/A      |
| 2.7 (4.13.6)      | Tumbling barrel   |                                | N/A      |
| <b>2.7 (4.14)</b> | <b>Suspensions, fixings and means of adjusting</b>                  |                                | <b>P</b> |
| 2.7 (4.14.1)      | Mechanical load:  |                                | P        |

| IEC 60598-2-2     |  |   |          |
|-------------------|--|---|----------|
| Clause            | Requirement + Test   | Result - Remark   | Verdict  |
|                   | A) four times the weight   | Ceiling mounting;<br>2018.135: 4 x 7,46 kg = 29,84 kg;<br>2018.126: 4 x 7,88 kg = 31,52 kg; | P        |
|                   | B) torque 2,5 Nm   |   | N/A      |
|                   | C) bracket arm; bending moment (Nm) ..... :                        |   | N/A      |
|                   | D) load track-mounted luminaires                                   |   | N/A      |
|                   | E) clip-mounted luminaires, glass-shelve. Thickness (mm) ..... :   |   | N/A      |
|                   | Metal rod. diameter (mm) ..... :                                   |   | N/A      |
|                   | Fixed luminaire or independent control gear without fixing devices |   | N/A      |
| 2.7 (4.14.2)      | Load to flexible cables  |   | N/A      |
|                   | Mass (kg) ..... :  |   | —        |
|                   | Stress in conductors (N/mm <sup>2</sup> ) ..... :                  |   | N/A      |
|                   | Mass (kg) of semi-luminaire ..... :                                |   | N/A      |
|                   | Bending moment (Nm) of semi-luminaire ..... :                      |   | N/A      |
| 2.7 (4.14.3)      | Adjusting devices:   |   | N/A      |
|                   | - flexing test; number of cycles ..... :                           |   | N/A      |
|                   | - strands broken ..... :   |   | N/A      |
|                   | - electric strength test afterwards                                |   | N/A      |
| 2.7 (4.14.4)      | Telescopic tubes: cords not fixed to tube; no strain on conductors |   | N/A      |
| 2.7 (4.14.5)      | Guide pulleys  |   | N/A      |
| 2.7 (4.14.6)      | Strain on socket-outlets   |   | N/A      |
| <b>2.7 (4.15)</b> | <b>Flammable materials</b>   |   | <b>P</b> |
|                   | - glow-wire test 650°C ..... :                                     | See Test Table 2.16 (13.3.2)  | P        |
|                   | - spacing ≥30 mm   |   | N/A      |
|                   | - screen withstanding test of 13.3.1                               |   | N/A      |
|                   | - screen dimensions  |   | N/A      |
|                   | - no fiercely burning material                                     |   | P        |
|                   | - thermal protection   |   | N/A      |
|                   | - electronic circuits exempted                                     |   | N/A      |
| 2.7 (4.15.2)      | Luminaires made of thermoplastic material with lamp control gear   |   | N/A      |
|                   | a) construction  |   | N/A      |
|                   | b) temperature sensing control                                     |   | N/A      |
|                   | c) surface temperature   |   | N/A      |

| IEC 60598-2-2     |  |                              |            |
|-------------------|--|------------------------------|------------|
| Clause            | Requirement + Test   | Result - Remark              | Verdict    |
| <b>2.7 (4.16)</b> | <b>Luminaires for mounting on normally flammable surfaces</b>  |                              | <b>P</b>   |
|                   | No lamp control gear..... :  | (compliance with Section 12) | P          |
|                   | Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces |                              | N/A        |
| 2.7 (4.16.1)      | Lamp control gear spacing:   |                              | N/A        |
|                   | - spacing 35 mm  |                              | N/A        |
|                   | - spacing 10 mm  |                              | N/A        |
| 2.7 (4.16.2)      | Thermal protection:  |                              | N/A        |
|                   | - in lamp control gear   |                              | N/A        |
|                   | - external   |                              | N/A        |
|                   | - fixed position   |                              | N/A        |
|                   | - temperature marked lamp control gear   |                              | N/A        |
| 2.7 (4.16.3)      | Design to satisfy the test of 12.6   | (see clause 12.6)            | N/A        |
| <b>2.7 (4.17)</b> | <b>Drain holes</b>   |                              | N/A        |
|                   | Clearance at least 5 mm  |                              | N/A        |
| <b>2.7 (4.18)</b> | <b>Resistance to corrosion</b>   |                              | <b>N/A</b> |
| 2.7 (4.18.1)      | - rust-resistance  |                              | N/A        |
| 2.7 (4.18.2)      | - season cracking in copper  |                              | N/A        |
| 2.7 (4.18.3)      | - corrosion of aluminium   |                              | N/A        |
| 2.7 (4.19)        | Igniters compatible with ballast   |                              | N/A        |
| 2.7 (4.20)        | Rough service vibration  |                              | N/A        |
| <b>2.7 (4.21)</b> | <b>Protective shield</b>   |                              | N/A        |
| 2.7 (4.21.1)      | Shield fitted if tungsten halogen lamps or metal halide lamps  |                              | N/A        |
|                   | Shield of glass if tungsten halogen lamps  |                              | N/A        |
| 2.7 (4.21.2)      | Particles from a shattering lamp not impair safety   |                              | N/A        |
| 2.7 (4.21.3)      | No direct path   |                              | N/A        |
| 2.7 (4.21.4)      | Impact test on shield  |                              | N/A        |
|                   | Glow-wire test on lamp compartment ..... :   | See Test Table 2.16 (13.3.2) | N/A        |
| 2.7 (4.22)        | Attachments to lamps not cause overheating or damage   |                              | N/A        |
| 2.7 (4.23)        | Semi-luminaires comply Class II  |                              | N/A        |
| <b>2.7 (4.24)</b> | <b>Photobiological hazards</b>   |                              | <b>P</b>   |
| 2.7 (4.24.1)      | No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)                       |                              | N/A        |
| 2.7 (4.24.2)      | Retinal blue light hazard  |                              | P          |

| IEC 60598-2-2     |  |                 |          |
|-------------------|--|-----------------|----------|
| Clause            | Requirement + Test   | Result - Remark | Verdict  |
|                   | Class of risk group assessed according to IEC/TR 62778 .....   | RG0             | —        |
|                   | Luminaires with $E_{thr}$ :  |                 | N/A      |
|                   | a) Fixed luminaires  | RG0             | N/A      |
|                   | - distance x m, borderline between RG1 and RG2.. :   |                 | N/A      |
|                   | - marking and instruction according 3.2.23   |                 | N/A      |
|                   | b) Portable and handheld luminaires  |                 | N/A      |
|                   | - marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778   |                 | N/A      |
|                   | Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778 |                 | N/A      |
| <b>2.7 (4.25)</b> | <b>Mechanical hazard</b>   |                 | <b>P</b> |
|                   | No sharp point or edges  |                 | P        |
| <b>2.7 (4.26)</b> | <b>Short-circuit protection</b>  |                 | N/A      |
| 2.7 (4.26.1)      | Adequate means of uninsulated accessible SELV parts  |                 | N/A      |
| 2.7 (4.26.2)      | Short-circuit test with test chain according 4.26.3  |                 | N/A      |
|                   | Test chain not melt through  |                 | N/A      |
|                   | Test sample not exceed values of Table 12.1 and 12.2   |                 | N/A      |
| <b>2.7 (4.27)</b> | <b>Terminal blocks with integrated screwless earthing contacts</b>   |                 | N/A      |
|                   | Test according Annex V   |                 | N/A      |
|                   | Pull test of terminal fixing (20 N)  |                 | N/A      |
|                   | After test, resistance < 0,05 $\Omega$   |                 | N/A      |
|                   | Pull test of mechanical connection (50 N)  |                 | N/A      |
|                   | After test, resistance < 0,05 $\Omega$   |                 | N/A      |
|                   | Voltage drop test, resistance < 0,05 $\Omega$  |                 | N/A      |
| <b>2.7 (4.28)</b> | <b>Fixing of thermal sensing control</b>   |                 | N/A      |
|                   | Not plug-in or easily replaceable type   |                 | N/A      |
|                   | Reliably kept in position  |                 | N/A      |
|                   | No adhesive fixing if UV radiations from a lamp can degrade the fixing   |                 | N/A      |
|                   | Not outside the luminaire enclosure  |                 | N/A      |
|                   | Test of adhesive fixing:   |                 | N/A      |
|                   | Max. temperature on adhesive material ( $^{\circ}\text{C}$ ) .....   |                 | —        |
|                   | 100 cycles between t min and t max   |                 | N/A      |
|                   | Temperature sensing control still in position  |                 | N/A      |

| IEC 60598-2-2     |   |                 |            |
|-------------------|---|-----------------|------------|
| Clause            | Requirement + Test  | Result - Remark | Verdict    |
| <b>2.7 (4.29)</b> | <b>Luminaires with non-replaceable light source</b>   |                 | <b>N/A</b> |
|                   | Not possible to replace light source  |                 | N/A        |
|                   | Live part not accessible after parts have been opened by hand or tools  |                 | N/A        |
| <b>2.7 (4.30)</b> | <b>Luminaires with non-user replaceable light source</b>  |                 | <b>N/A</b> |
|                   | If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:  |                 | N/A        |
|                   | Minimum two fixing means  |                 | N/A        |
| <b>2.7 (4.31)</b> | <b>Insulation between circuits</b>  |                 | <b>N/A</b> |
|                   | Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3   |                 | N/A        |
|                   | Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3 |                 | N/A        |
| 2.7 (4.31.1)      | SELV circuits   |                 | N/A        |
|                   | Used SELV source  |                 | N/A        |
|                   | Voltage ≤ ELV   |                 | N/A        |
|                   | Insulating of SELV circuits from LV supply  |                 | N/A        |
|                   | Insulating of SELV circuits from other non SELV circuits  |                 | N/A        |
|                   | Insulating of SELV circuits from FELV   |                 | N/A        |
|                   | Insulating of SELV circuits from other SELV circuits  |                 | N/A        |
|                   | SELV circuits insulated from accessible parts according Table X.1   |                 | N/A        |
|                   | Plugs not able to enter socket-outlets of other voltage systems   |                 | N/A        |
|                   | Socket outlets does not admit plugs of other voltage systems  |                 | N/A        |
|                   | Plugs and socket-outlets does not have protective conductor contact   |                 | N/A        |
| 2.7 (4.31.2)      | FELV circuits   |                 | N/A        |
|                   | Used FELV source  |                 | N/A        |
|                   | Voltage ≤ ELV   |                 | N/A        |
|                   | Insulating of FELV circuits from LV supply  |                 | N/A        |
|                   | FELV circuits insulated from accessible parts according Table X.1   |                 | N/A        |
|                   | Plugs not able to enter socket-outlets of other voltage systems   |                 | N/A        |
|                   | Socket outlets does not admit plugs of other voltage systems  |                 | N/A        |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|                   |  |  |     |
|-------------------|--|--|-----|
|                   | Socket-outlets does not have protective conductor contact  |  | N/A |
| 2.7 (4.31.3)      | Other circuits   |  | N/A |
|                   | Other circuits insulated from accessible parts according Table X.1   |  | N/A |
|                   | Class II construction with equipotential bonding for protection against indirect contacts with live parts: |  | N/A |
|                   | - conductive parts are connected together  |  | N/A |
|                   | - test according 7.2.3   |  | N/A |
|                   | - conductive part not cause an electric shock in case of an insulation fault                               |  | N/A |
|                   | - equipotential bonding in master/slave applications   |  | N/A |
|                   | - master luminaire provided with terminal for accessible conductive parts of slave luminaires              |  | N/A |
|                   | - slave luminaire constructed as class I   |  | N/A |
| <b>2.7 (4.32)</b> | <b>Overvoltage protective devices</b>  |  | N/A |
|                   | Comply with IEC 61643-11   |  | N/A |
|                   | External to controlgear and connected to earth:  |  | N/A |
|                   | - only in fixed luminaires   |  | N/A |
|                   | - only connected to protective earth   |  | N/A |

|                 |  |   |            |
|-----------------|--|---|------------|
| <b>2.8 (11)</b> | <b>CREEPAGE DISTANCES AND CLEARANCES</b>   |   | <b>N/A</b> |
| 2.8 (11.2.1)    | Impulse withstand category (Normal category II)  | Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/> | —          |
|                 | Category III according Annex U   |   | N/A        |
|                 | Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1       |   | N/A        |
| 2.8 (11.2.2)    | Creepage distances for frequency up to 30 kHz  | See Test Table 2.8 (11.2) I   | N/A        |
|                 | Creepage distances for frequency over 30 kHz:  |   | N/A        |
|                 | - Controlgear marked with $\hat{U}_{OUT}$ and $f_{UOUT}$ according IEC 61347-1, clause 7.1, item w | See Test Table 2.8 (11.2) II  | N/A        |
|                 | - Requirements according IEC 60664-4 for controlgear not covered by IEC 61347                      | See Test Table 2.8 (11.2) II  | N/A        |
| 2.8 (11.2.3)    | Clearances for frequency up to 30 kHz  | See Test Table 2.8 (11.2) I   | N/A        |
|                 | Clearances distances for frequency over 30 kHz:  |   | N/A        |
|                 | - Controlgear marked with $U_P$  | See Test Table 2.8 (11.2) II  | N/A        |
|                 | - Requirements according IEC 60664-4 for controlgear not covered by IEC 61347                      | See Test Table 2.8 (11.2) II  | N/A        |

|                |                               |  |     |
|----------------|-------------------------------|--|-----|
| <b>2.9 (7)</b> | <b>PROVISION FOR EARTHING</b> |  | N/A |
|----------------|-------------------------------|--|-----|

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|                     |  |  |     |
|---------------------|--|--|-----|
| 2.9 (7.2.1 + 7.2.3) | Accessible metal parts   |  | N/A |
|                     | Metal parts in contact with supporting surface                                       |  | N/A |
|                     | Resistance < 0,5 Ω .....   |  | N/A |
|                     | Self-tapping screws used   |  | N/A |
|                     | Thread-forming screws  |  | N/A |
|                     | Thread-forming screw used in a groove  |  | N/A |
|                     | Earth makes contact first  |  | N/A |
|                     | Terminal blocks with integrated screwless earthing contacts tested according Annex V |  | N/A |
|                     | Protective earthing of the luminaire not via built-in control gear                   |  | N/A |
| 2.9 (7.2.2 + 7.2.3) | Earth continuity in joints, etc.   |  | N/A |
| 2.9 (7.2.4)         | Locking of clamping means  |  | N/A |
|                     | Compliance with 4.7.3  |  | N/A |
|                     | Terminal blocks with integrated screwless earthing contacts tested according Annex V |  | N/A |
| 2.9 (7.2.5)         | Earth terminal integral part of connector socket                                     |  | N/A |
| 2.9 (7.2.6)         | Earth terminal adjacent to mains terminals   |  | N/A |
| 2.9 (7.2.7)         | Electrolytic corrosion of the earth terminal   |  | N/A |
| 2.9 (7.2.8)         | Material of earth terminal   |  | N/A |
|                     | Contact surface bare metal   |  | N/A |
| 2.9 (7.2.10)        | Class II luminaire for looping-in  |  | N/A |
|                     | Double or reinforced insulation to functional earth                                  |  | N/A |
| 2.9 (7.2.11)        | Earthing core coloured green-yellow  |  | N/A |
|                     | Length of earth conductor  |  | N/A |

|                  |                                     |                                       |     |
|------------------|-------------------------------------|---------------------------------------|-----|
| <b>2.10 (14)</b> | <b>SCREW TERMINALS</b>              |                                       | P   |
|                  | Separately approved; component list | (see Annex 1) Approved terminal block | P   |
|                  | Part of the luminaire               | (see Annex 3)                         | N/A |

|                  |   |               |     |
|------------------|---|---------------|-----|
| <b>2.10 (15)</b> | <b>SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS</b> |               | N/A |
|                  | Separately approved; component list .....             | (see Annex 1) | N/A |
|                  | Part of the luminaire .....                           | (see Annex 4) | N/A |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|                   |  |                         |          |
|-------------------|--|-------------------------|----------|
| <b>2.11 (5)</b>   | <b>EXTERNAL AND INTERNAL WIRING</b>  |                         | <b>P</b> |
| <b>2.11 (5.2)</b> | <b>Supply connection and external wiring</b>   |                         | <b>P</b> |
| 2.11 (5.2.1)      | Means of connection..... :   | Terminal block          | P        |
|                   | Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment |                         | N/A      |
| 2.11 (5.2.2)      | Type of cable..... :   | H03VV-F                 | P        |
|                   | Nominal cross-sectional area (mm <sup>2</sup> )..... :   | 2 x 1,0 mm <sup>2</sup> | P        |
|                   | Cables equal to IEC 60227 or IEC 60245   |                         | N/A      |
| 2.11 (5.2.3)      | Type of attachment, X, Y or Z  | Type Y                  | P        |
| 2.11 (5.2.5)      | Type Z not connected to screws   |                         | N/A      |
| 2.11 (5.2.6)      | Cable entries:   |                         | P        |
|                   | - suitable for introduction  |                         | P        |
|                   | - adequate degree of protection  |                         | P        |
| 2.11 (5.2.7)      | Cable entries through rigid material have rounded edges  |                         | P        |
| 2.11 (5.2.8)      | Insulating bushings:   |                         | N/A      |
|                   | - suitably fixed   |                         | N/A      |
|                   | - material in bushings   |                         | N/A      |
|                   | - material not likely to deteriorate   |                         | N/A      |
|                   | - tubes or guards made of insulating material  |                         | N/A      |
| 2.11 (5.2.9)      | Locking of screwed bushings  |                         | N/A      |
| 2.11 (5.2.10)     | Cord anchorage:  |                         | P        |
|                   | - covering protected from abrasion   |                         | P        |
|                   | - clear how to be effective  |                         | P        |
|                   | - no mechanical or thermal stress  |                         | P        |
|                   | - no tying of cables into knots etc.   |                         | P        |
|                   | - insulating material or lining  |                         | N/A      |
| 2.11 (5.2.10.1)   | Cord anchorage for type X attachment:  |                         | N/A      |
|                   | a) at least one part fixed   |                         | N/A      |
|                   | b) types of cable  |                         | N/A      |
|                   | c) no damaging of the cable  |                         | N/A      |
|                   | d) whole cable can be mounted  |                         | N/A      |
|                   | e) no touching of clamping screws  |                         | N/A      |
|                   | f) metal screw not directly on cable   |                         | N/A      |
|                   | g) replacement without special tool  |                         | N/A      |

| IEC 60598-2-2      |  |                 |          |
|--------------------|--|-----------------|----------|
| Clause             | Requirement + Test   | Result - Remark | Verdict  |
|                    | Glands not used as anchorage                                       |                 | N/A      |
|                    | Labyrinth type anchorages  |                 | N/A      |
| 2.11<br>(5.2.10.2) | Adequate cord anchorage for type Y and type Z attachment           |                 | P        |
| 2.11<br>(5.2.10.3) | Tests:   |                 | P        |
|                    | - impossible to push cable; unsafe                                 |                 | P        |
|                    | - pull test: 25 times; pull (N) ..... : 60 N                       |                 | P        |
|                    | - torque test: torque (Nm)..... : 0,15 Nm                          |                 | P        |
|                    | - displacement ≤ 2 mm  |                 | P        |
|                    | - no movement of conductors  |                 | P        |
|                    | - no damage of cable or cord                                       |                 | P        |
|                    | - function independent of electrical connection                    |                 | P        |
| 2.11<br>(5.2.11)   | External wiring passing into luminaire                             |                 | P        |
| 2.11<br>(5.2.12)   | Looping-in terminals   |                 | N/A      |
| 2.11<br>(5.2.13)   | Wire ends not tinned   |                 | N/A      |
|                    | Wire ends tinned: no cold flow                                     |                 | P        |
| 2.11<br>(5.2.14)   | Mains plug same protection   |                 | N/A      |
|                    | Class III luminaire plug   |                 | P        |
|                    | No unsafe compatibility  |                 | P        |
| 2.11<br>(5.2.16)   | Appliance inlets (IEC 60320)                                       |                 | N/A      |
|                    | Installation couplers (IEC 61535)                                  |                 | N/A      |
|                    | Other appliance inlet or connector according relevant IEC standard |                 | N/A      |
| 2.11<br>(5.2.17)   | No standardized interconnecting cables properly assembled          |                 | N/A      |
| 2.11<br>(5.2.18)   | Used plug in accordance with                                       |                 | N/A      |
|                    | - IEC 60083  |                 | N/A      |
|                    | - other standard   |                 | N/A      |
| <b>2.11 (5.3)</b>  | <b>Internal wiring</b>   |                 | <b>P</b> |
| 2.11 (5.3.1)       | Internal wiring of suitable size and type                          | See ANNEX 1     | P        |
|                    | Through wiring   |                 | N/A      |
|                    | - not delivered/ mounting instruction                              |                 | N/A      |
|                    | - factory assembled  |                 | N/A      |

| IEC 60598-2-2     |  |                 |          |
|-------------------|--|-----------------|----------|
| Clause            | Requirement + Test   | Result - Remark | Verdict  |
|                   | - socket outlet loaded (A) .....   |                 | N/A      |
|                   | - temperatures.....  | (see Annex 2)   | N/A      |
|                   | Green-yellow for earth only  |                 | N/A      |
| 2.11<br>(5.3.1.1) | Internal wiring connected directly to fixed wiring   |                 | N/A      |
|                   | Cross-sectional area (mm <sup>2</sup> ) .....  |                 | N/A      |
|                   | Insulation thickness (mm) .....  |                 | N/A      |
|                   | Extra insulation added where necessary   |                 | N/A      |
| 2.11<br>(5.3.1.2) | Internal wiring connected to fixed wiring via internal current-limiting device                           |                 | P        |
|                   | Cross-sectional area (mm <sup>2</sup> ) .....  | See Annex 1     | P        |
| 2.11<br>(5.3.1.3) | Double or reinforced insulation for class II   |                 | N/A      |
| 2.11<br>(5.3.1.4) | Conductors without insulation  |                 | N/A      |
| 2.11<br>(5.3.1.5) | SELV current-carrying parts  |                 | P        |
| 2.11<br>(5.3.1.6) | Insulation thickness other than PVC or rubber  |                 | N/A      |
| 2.11 (5.3.2)      | Sharp edges etc.   |                 | P        |
|                   | No moving parts of switches etc.   |                 | N/A      |
|                   | Joints, raising/lowering devices   |                 | N/A      |
|                   | Telescopic tubes etc.  |                 | N/A      |
|                   | No twisting over 360°  |                 | N/A      |
| 2.11 (5.3.3)      | Insulating bushings:   |                 | N/A      |
|                   | - suitable fixed   |                 | N/A      |
|                   | - material in bushings   |                 | N/A      |
|                   | - material not likely to deteriorate   |                 | N/A      |
|                   | - cables with protective sheath  |                 | N/A      |
| 2.11 (5.3.4)      | Joints and junctions effectively insulated   |                 | N/A      |
| 2.11 (5.3.5)      | Strain on internal wiring  |                 | P        |
| 2.11 (5.3.6)      | Wire carriers  |                 | P        |
| 2.11 (5.3.7)      | Wire ends not tinned   |                 | N/A      |
|                   | Wire ends tinned: no cold flow   |                 | P        |
| <b>2.11 (5.4)</b> | <b>Test to determine suitability of conductors having a reduced cross-sectional area</b>                 |                 | <b>P</b> |
|                   | Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2 | (see Annex 2)   | P        |
|                   | No damage to luminaire wiring after test   |                 | P        |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|                 |  |           |     |
|-----------------|--|-----------|-----|
| <b>2.12 (8)</b> | <b>PROTECTION AGAINST ELECTRIC SHOCK</b>   |           | N/A |
| 2.12 (8.2.1)    | Live parts not accessible  | Class III | N/A |
|                 | Basic insulated parts not used on the outer surface without appropriate protection                                     |           | N/A |
|                 | Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires         |           | N/A |
|                 | Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires                        |           | N/A |
|                 | Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements |           | N/A |
|                 | Basic insulation only accessible under lamp or starter replacement   |           | N/A |
|                 | Protection in any position   |           | N/A |
|                 | Double-ended tungsten filament lamp  |           | N/A |
|                 | Insulation lacquer not reliable  |           | N/A |
|                 | Double-ended high-pressure discharge lamp  |           | N/A |
|                 | Relevant warning according to 3.2.18 fitted to the luminaire   |           | N/A |
| 2.12 (8.2.2)    | Portable luminaire adjusted in most unfavourable position  |           | N/A |
| 2.12 (8.2.3.a)  | Class II luminaire:  |           | N/A |
|                 | - basic insulated metal parts not accessible during starter or lamp replacement  |           | N/A |
|                 | - basic insulation not accessible other than during starter or lamp replacement  |           | N/A |
|                 | - glass protective shields not used as supplementary insulation  |           | N/A |
| 2.12 (8.2.3.b)  | BC lampholder of metal in class I luminaires shall be earthed  |           | N/A |
| 2.12 (8.2.3.c)  | SELV circuits with exposed current carrying parts:   |           | N/A |
|                 | Ordinary luminaire:  |           | N/A |
|                 | - voltage under load (V) .....   | :         | N/A |
|                 | - no-load voltage (V) .....  | :         | N/A |
|                 | - touch current if applicable (mA) .....   | :         | N/A |
|                 | One conductive part insulated if required  |           | N/A |
|                 | Other than ordinary luminaire:   |           | N/A |

| IEC 60598-2-2 |  |                 |         |
|---------------|--|-----------------|---------|
| Clause        | Requirement + Test   | Result - Remark | Verdict |
|               | - nominal voltage (V) .....  |                 | N/A     |
|               | Class III luminaire only for connection to SELV  |                 | N/A     |
|               | Class III luminaire not provided with means for protective earthing  |                 | N/A     |
| 2.12 (8.2.4)  | Portable luminaire has protection independent of supporting surface  |                 | N/A     |
| 2.12 (8.2.5)  | Compliance with the standard test finger or relevant probe   |                 | N/A     |
| 2.12 (8.2.6)  | Covers reliably secured  |                 | N/A     |
| 2.12 (8.2.7)  | Luminaire other than below with capacitor > 0,5 μF not exceed 50 V 1 min after disconnection                             |                 | N/A     |
|               | Portable luminaire with capacitor > 0,1 μF (0.25) not exceed 34 V 1 s after disconnection                                |                 | N/A     |
|               | Other luminaires with capacitor > 0,1 μF (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection     |                 | N/A     |
| 2.12 (-)      | Parts within the ceiling space provide same degree of protection against electric shock as parts below the ceiling space |                 | N/A     |

|                    |   |                                |            |
|--------------------|---|--------------------------------|------------|
| <b>2.13 (12)</b>   | <b>ENDURANCE TEST AND THERMAL TEST</b>  |                                | <b>P</b>   |
| 2.13.1 (-)         | If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 2.14 |                                | —          |
| <b>2.13 (12.2)</b> | <b>Selection of lamps and ballasts</b>  |                                | <b>—</b>   |
|                    | Lamp used according Annex B   | (Lamp used see Annex 2)        | —          |
|                    | Controlgear if separate and not supplied  | (Controlgear used see Annex 2) | —          |
| <b>2.13 (12.3)</b> | <b>Endurance test</b>   |                                | <b>P</b>   |
|                    | a) mounting-position .....  | Normal used                    | —          |
|                    | b) test temperature (°C) .....  | 35                             | —          |
|                    | c) total duration (h) .....   | 240                            | —          |
|                    | d) supply voltage (V) .....   | 26,4 V                         | —          |
|                    | d) if not equipped with controlgear, constant voltage/current (V) or (A) .....                      | --                             | —          |
|                    | e) luminaire ceases to operate  | —                              | —          |
| 2.13 (12.3.2)      | After endurance test:   |                                | <b>P</b>   |
|                    | - no part unserviceable   |                                | <b>P</b>   |
|                    | - luminaire not unsafe  |                                | <b>P</b>   |
|                    | - no damage to track system   |                                | <b>N/A</b> |
|                    | - marking legible   |                                | <b>P</b>   |

| IEC 60598-2-2      |   |                 |         |
|--------------------|---|-----------------|---------|
| Clause             | Requirement + Test  | Result - Remark | Verdict |
|                    | - no cracks, deformation etc.   |                 | P       |
| <b>2.13 (12.4)</b> | <b>Thermal test (normal operation)</b>                                    | (see Annex 2)   | P       |
| <b>2.13 (12.5)</b> | <b>Thermal test (abnormal operation)</b>                                  | (see Annex 2)   | N/A     |
| <b>2.13 (12.6)</b> | <b>Thermal test (failed lamp control gear condition):</b>                 |                 | N/A     |
| 2.13 (12.6.1)      | Through wiring or looping-in wiring loaded by a current of (A) .....      |                 | —       |
|                    | - case of abnormal conditions .....                                       |                 | —       |
|                    | - electronic lamp control gear  |                 | N/A     |
|                    | - measured winding temperature (°C): at 1,1 Un ....                       |                 | —       |
|                    | - measured mounting surface temperature (°C) at 1,1 Un .....              |                 | N/A     |
|                    | - calculated mounting surface temperature (°C) .....                      |                 | N/A     |
|                    | - track-mounted luminaires  |                 | N/A     |
| 2.13 (12.6.2)      | Temperature sensing control   |                 | N/A     |
|                    | - case of abnormal conditions .....                                       |                 | —       |
|                    | - thermal link  |                 | N/A     |
|                    | - manual reset cut-out  |                 | N/A     |
|                    | - auto reset cut-out  |                 | N/A     |
|                    | - measured mounting surface temperature (°C) .....                        |                 | N/A     |
|                    | - track-mounted luminaires  |                 | N/A     |
| <b>2.13 (12.7)</b> | <b>Thermal test (failed lamp control gear in plastic luminaires):</b>     |                 | N/A     |
| 2.13 (12.7.1)      | Luminaire without temperature sensing control                             |                 | N/A     |
| 2.13 (12.7.1.1)    | Luminaire with fluorescent lamp ≤ 70W                                     |                 | N/A     |
|                    | Test method 12.7.1.1 or Annex W .....                                     |                 | —       |
|                    | Test according to 12.7.1.1:   |                 | N/A     |
|                    | - case of abnormal conditions .....                                       |                 | —       |
|                    | - Ballast failure at supply voltage (V) .....                             |                 | —       |
|                    | - Components retained in place after the test                             |                 | N/A     |
|                    | - Test with standard test finger after the test                           |                 | N/A     |
|                    | Test according to Annex W:  |                 | N/A     |
|                    | - case of abnormal conditions .....                                       |                 | —       |
|                    | - measured winding temperature (°C): at 1,1 Un.....                       |                 | —       |
|                    | - measured temperature of fixing point/exposed part (°C): at 1,1 Un ..... |                 | —       |

| <b>IEC 60598-2-2</b> |                    |                 |         |
|----------------------|--------------------|-----------------|---------|
| Clause               | Requirement + Test | Result - Remark | Verdict |

|                 |  |  |     |
|-----------------|--|--|-----|
|                 | - calculated temperature of fixing point/exposed part (°C)..... :          |  | —   |
|                 | Ball-pressure test..... :  | See Test Table 2.16 (13.2.1)                             | N/A |
| 2.13 (12.7.1.2) | Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA |  | N/A |
|                 | - case of abnormal conditions..... :                                       |  | —   |
|                 | - measured winding temperature (°C): at 1,1 Un..... :                      |  | —   |
|                 | - measured temperature of fixing point/exposed part (°C): at 1,1 Un..... : |  | —   |
|                 | - calculated temperature of fixing point/exposed part (°C)..... :          |  | —   |
|                 | Ball-pressure test..... :  | See Test Table 2.16 (13.2.1)                             | N/A |
| 2.13 (12.7.1.3) | Luminaire with short circuit proof transformers ≤ 10 VA                    |  | N/A |
|                 | - case of abnormal conditions..... :                                       |  | —   |
|                 | - Components retained in place after the test                              |  | N/A |
|                 | - Test with standard test finger after the test                            |  | N/A |
| 2.13 (12.7.2)   | Luminaire with temperature sensing control                                 |  | N/A |
|                 | - thermal link..... :  | Yes <input type="checkbox"/> No <input type="checkbox"/> | —   |
|                 | - manual reset cut-out..... :  | Yes <input type="checkbox"/> No <input type="checkbox"/> | —   |
|                 | - auto reset cut-out..... :  | Yes <input type="checkbox"/> No <input type="checkbox"/> | —   |
|                 | - case of abnormal conditions..... :                                       |  | —   |
|                 | - highest measured temperature of fixing point/exposed part (°C):..... :   |  | —   |
|                 | Ball-pressure test:..... :   | See Test Table 2.16 (13.2.1)                             | N/A |
| 2.13.1 (-)      | Wiring, for connection to the supply, not reach unsafe temperature         |  | P   |
|                 | - measured temperature of the cable (°C)..... :                            | Max. 49,6 °C   | P   |

|                 |  |                                |     |
|-----------------|--|--------------------------------|-----|
| <b>2.14 (9)</b> | <b>RESISTANCE TO DUST AND MOISTURE</b>                       |                                | P   |
| 2.14 (-)        | If IP > IP 20 the order of tests as specified in clause 2.13 |                                | N/A |
| 2.14 (9.2)      | Tests for ingress of dust, solid objects and moisture:       |                                | P   |
|                 | - classification according to IP..... :                      | IP20                           | —   |
|                 | - mounting position during test..... :                       | Recessed mounted as normal use | —   |
|                 | - fixing screws tightened; torque (Nm)..... :                | --                             | —   |
|                 | - tests according to clauses..... :                          | Cl 9.2.0                       | —   |
|                 | - electric strength test afterwards                          |                                | P   |

| IEC 60598-2-2 |  |                 |         |
|---------------|--|-----------------|---------|
| Clause        | Requirement + Test   | Result - Remark | Verdict |
|               | a) no deposit in dust-proof luminaire  |                 | N/A     |
|               | b) no talcum in dust-tight luminaire   |                 | N/A     |
|               | c) no trace of water on current-carrying parts or on insulation where it could become a hazard |                 | N/A     |
|               | c.1) For luminaires without drain holes – no water entry                                       |                 | N/A     |
|               | c.2) For luminaires with drain holes – no hazardous water entry                                |                 | N/A     |
|               | d) no water in watertight or pressure watertight luminaire                                     |                 | N/A     |
|               | e) no contact with live parts (IP 2X)  |                 | P       |
|               | e) no entry into enclosure (IP 3X and IP 4X)   |                 | N/A     |
|               | e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)        |                 | N/A     |
|               | f) no trace of water on part of lamp requiring protection from splashing water                 |                 | N/A     |
|               | g) no damage of protective shield or glass envelope  |                 | N/A     |
| 2.14 (9.3)    | Humidity test 48 h   | 25 °C; 93 % Rh  | P       |

|                  |  |          |     |
|------------------|--|----------|-----|
| <b>2.15 (10)</b> | <b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>   |          | P   |
| 2.15 (10.2.1)    | Insulation resistance test   |          | P   |
|                  | Cable or cord covered by metal foil or replaced by a metal rod of mm Ø .....   |          | —   |
|                  | Insulation resistance (MΩ) .....   |          | —   |
|                  | SELV   |          | P   |
|                  | - between current-carrying parts of different polarity :   |          | N/A |
|                  | - between current-carrying parts and mounting surface .....  | > 100 MΩ | P   |
|                  | - between current-carrying parts and metal parts of the luminaire.....   | > 100 MΩ | P   |
|                  | - between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts ..... | > 100 MΩ | P   |
|                  | - Insulation bushings as described in Section 5 .....  |          | N/A |
|                  | Other than SELV  |          | N/A |
|                  | - between live parts of different polarity .....   |          | N/A |
|                  | - between live parts and mounting surface .....  |          | N/A |
|                  | - between live parts and metal parts .....   |          | N/A |
|                  | - between live parts of different polarity through action of a switch .....  |          | N/A |

| IEC 60598-2-2 |  |                 |         |
|---------------|--|-----------------|---------|
| Clause        | Requirement + Test   | Result - Remark | Verdict |
|               | - between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts ..... |                 | N/A     |
|               | - Insulation bushings as described in Section 5 .....  |                 | N/A     |
| 2.15 (10.2.2) | Electric strength test   |                 | P       |
|               | Dummy lamp   |                 | N/A     |
|               | Luminaires with ignitors after 24 h test   |                 | N/A     |
|               | Luminaires with manual ignitors  |                 | N/A     |
|               | Test voltage (V).....  |                 | N/A     |
|               | SELV   |                 | P       |
|               | - between current-carrying parts of different polarity :   |                 | N/A     |
|               | - between current-carrying parts and mounting surface .....  | 500 V           | P       |
|               | - between current-carrying parts and metal parts of the luminaire.....   | 500 V           | P       |
|               | - between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts ..... | 500 V           | P       |
|               | - Insulation bushings as described in Section 5 .....  |                 | N/A     |
|               | Other than SELV  |                 | N/A     |
|               | - between live parts of different polarity .....   |                 | N/A     |
|               | - between live parts and mounting surface .....  |                 | N/A     |
|               | - between live parts and metal parts .....   |                 | N/A     |
|               | - between live parts of different polarity through action of a switch .....  |                 | N/A     |
|               | - between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts ..... |                 | N/A     |
|               | - Insulation bushings as described in Section 5 .....  |                 | N/A     |
| 2.15 (10.3)   | Touch current or protective conductor current (mA):  |                 | N/A     |

|                  |  |                              |     |
|------------------|--|------------------------------|-----|
| <b>2.16 (13)</b> | <b>RESISTANCE TO HEAT, FIRE AND TRACKING evaluated in final products</b> |                              | P   |
| 2.16 (13.2.1)    | Ball-pressure test .....   | See Test Table 2.16 (13.2.1) | P   |
| 2.16 (13.3.1)    | Needle-flame test (10 s).....  | See Test Table 2.16 (13.3.1) | P   |
| 2.16 (13.3.2)    | Glow-wire test (650°C).....  | See Test Table 2.16 (13.3.2) | P   |
| 2.16 (13.4)      | Proof tracking test (IEC 60112).....                                     | See Test Table 2.16 (13.4)   | N/A |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

| 2.8 (11.2)   | <b>TABLE I: Creepage distances and clearances</b>                       |                    |           |        |  |          | N/A    |
|--|---|--------------------|-----------|--------|--|----------|--------|
|  | <b>Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages</b> |                    |           |        |  |          | N/A    |
|  | <b>Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*</b>  |                    |           |        |  |          | N/A    |
|  | Insulation type **  | Measured clearance | Required  |        | Measured creepage  | Required |        |
|  |   |                    | clearance | *Table |  | creepage | *Table |
| Distance 1:  | —   | —                  | —         | 11.1   | —  | —        | 11.1   |
| Working voltage (V).....:  |   |                    |           |        | DC24 V   |          | —      |
| PTI.....:  |   |                    |           |        | < 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/> |          | —      |
| Pulse voltage or $U_P$ if applicable (kV) .....  |   |                    |           |        | —  |          | —      |
| Supplementary information: Different polarity of L & N on LED driver; Two pins of fuse on LED driver                                   |   |                    |           |        |  |          |        |
| Distance 2:  | —   | —                  | —         | 11.1   | —  | —        | 11.1   |
| Working voltage (V).....:  |   |                    |           |        | DC24 V   |          | —      |
| PTI.....:  |   |                    |           |        | < 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/> |          | —      |
| Pulse voltage or $U_P$ if applicable (kV) .....  |   |                    |           |        | —  |          | —      |
| Supplementary information: 1) Outer of surface of cable where it is clamped and metal parts; 2) basic insulation wires and metal parts |   |                    |           |        |  |          |        |
| Distance 3:  | R   | —                  | —         | 11.1   | —  | —        | 11.1   |
| Working voltage (V).....:  |   |                    |           |        | DC24 V   |          | —      |
| PTI.....:  |   |                    |           |        | < 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/> |          | —      |
| Pulse voltage or $U_P$ if applicable (kV) .....  |   |                    |           |        | —  |          | —      |
| Supplementary information: live parts and metal enclosure/ mounting surface  |   |                    |           |        |  |          |        |
| Distance 4:  | R   | —                  | —         | 11.1   | —  | —        | 11.1   |
| Working voltage (V).....:  |   |                    |           |        | DC24 V   |          | —      |
| PTI.....:  |   |                    |           |        | < 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/> |          | —      |
| Pulse voltage or $U_P$ if applicable (kV) .....  |   |                    |           |        | —  |          | —      |
| Supplementary information: Current-carrying parts in primary circuit and secondary circuit.  |   |                    |           |        |  |          |        |

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

| 2.8 (11.2)                | <b>TABLE II: Creepage distances and clearances (Approved class II independent LED driver)</b> |                    |           |          |                   |          | N/A     |
|---------------------------|---|--------------------|-----------|----------|-------------------|----------|---------|
|                           | <b>Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages</b>                 |                    |           |          |                   |          |         |
|                           | <b>Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2</b>             |                    |           |          |                   |          |         |
| Distances                 | Insulation type **  | Measured clearance | Required  |          | Measured creepage | Required |         |
|                           |   |                    | clearance | *Table   |                   | creepage | *Table  |
| Distance 1:               | R   | —                  | —         | Table 11 | —                 | —        | Table 8 |
| Working voltage (V).....: |   |                    |           |          | DC24 V            |          | —       |

| IEC 60598-2-2   |                    |  |         |
|---|--------------------|--|---------|
| Clause  | Requirement + Test | Result - Remark  | Verdict |
| Frequency if applicable (kHz).....:   |                    | —  | —       |
| PTI.....:   |                    | < 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/> | —       |
| Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....                  |                    | —  | —       |
| Supplementary information: Current-carrying parts in primary circuit and secondary circuit. |                    |  |         |

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced.

| 2.16 (13.2.1)   | TABLE: Ball Pressure Test of Thermoplastics |                       |                          | N/A     |
|---|---|-----------------------|--------------------------|---------|
| Allowed impression diameter (mm) .....                  |   | 2                     |                          | —       |
| Object/ Part No./ Material                              | Manufacturer/ trademark                     | Test temperature (°C) | Impression diameter (mm) | Verdict |
| --  | --  | --                    | --                       | --      |
| Supplementary information: evaluated in final products. |   |                       |                          |         |

| 2.16 (13.3.1)   | TABLE: Needle-flame test (IEC 60695-11-5) |   |                                    |                              | N/A     |
|---|---|---|------------------------------------|------------------------------|---------|
| Object/ Part No./ Material                              | Manufacturer/ trademark                   | Duration of application of test flame (ta); (s) | Ignition of specified layer Yes/No | Duration of burning (tb) (s) | Verdict |
| --  | --  | --  | --                                 | --                           | --      |
| Supplementary information: evaluated in final products. |   |   |                                    |                              |         |

| 2.16 (13.3.2)   | TABLE: Glow-wire test (IEC 60695-2-11) |                                    |                              |         | N/A |
|---|--|------------------------------------|------------------------------|---------|-----|
| Glow wire temperature .....                             |  | 650°C                              |                              |         | —   |
| Object/ Part No./ Material                              | Manufacturer/ trademark                | Ignition of specified layer Yes/No | Duration of burning (tb) (s) | Verdict |     |
| --  | --                                     | --                                 | --                           | --      |     |
| Supplementary information: evaluated in final products. |  |                                    |                              |         |     |

| 2.16 (13.4)                  | TABLE: Proof tracking test (IEC 60112) |  |   | N/A     |
|------------------------------|--|--|---|---------|
| Test voltage PTI .....       |  | 175 V  |   | —       |
| Object/ Part No./ Material   | Manufacturer/ trademark                | Withstand 50 drops without failure on three places or on three specimens |   | Verdict |
| —                            | —                                      | —  | — | N/A     |
| Supplementary information: — |  |  |   |         |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|                |  |  |          |
|----------------|--|--|----------|
| <b>ANNEX 1</b> | <b>TABLE: Critical components information</b><br><b>Refer to the report for final products</b> |  | <b>P</b> |
|----------------|--|--|----------|

|                |   |  |          |
|----------------|---|--|----------|
| <b>ANNEX 2</b> | <b>TABLE: Thermal tests of Section 12</b> |  | <b>P</b> |
|----------------|---|--|----------|

|             |  |  |   |
|-------------|--|--|---|
|             | Type reference .....   | 2018.135   | — |
|             | Lamp used .....  | Non replaceable LED module and UV module           | — |
|             | Lamp control gear used .....   | —  | — |
|             | Mounting position of luminaire .....   | Recessed in ceiling                                | — |
|             | Supply wattage (W) .....   | 33,8 W   | — |
|             | Supply current (A) .....   | 1,28 A   | — |
|             | Temperatures in test 1 - 4 below are corrected for $t_a$ (°C) .....  | 25   | — |
|             | - abnormal operating mode .....  | —  | — |
| 1.12 (12.4) | - test 1: rated voltage .....  | —  | — |
|             | - test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current ..... | 1,1 times constant voltage:<br>1,1 x 24 V = 26,4 V | — |
|             | - test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage .....                  | —  | — |
|             | Through wiring or looping-in wiring loaded by a current of A during the test .....                         | —  | — |
| 1.12 (12.5) | - test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current .....  | —  | — |

| Temperature measurements (°C) |         |                   |        |        |       |                     |       |
|-------------------------------|---------|-------------------|--------|--------|-------|---------------------|-------|
| Part                          | Ambient | Cl. 12.4 – normal |        |        |       | Cl. 12.5 – abnormal |       |
|                               |         | test 1            | test 2 | test 3 | limit | test 4              | limit |
| UV LED                        | 25      | —                 | 47,1   | —      | Ref.  | —                   | —     |
| UV LED PCB                    | 25      | —                 | 44,7   | —      | 130   | —                   | —     |
| UV LED wire                   | 25      | —                 | 31,9   | —      | 125   | —                   | —     |
| White LED wire                | 25      | —                 | 44,7   | —      | 125   | —                   | —     |
| White LED                     | 25      | —                 | 68,6   | —      | Ref.  | —                   | —     |
| White LED PCB                 | 25      | —                 | 66,4   | —      | 130   | —                   | —     |
| Terminal block                | 25      | —                 | 33,7   | —      | 85    | —                   | —     |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

|   |    |   |      |   |      |   |   |
|---|----|---|------|---|------|---|---|
| Black enclosure covered terminal (internal); also represent outer surface | 25 | — | 31,2 | — | Ref. | — | — |
| Wire clamped by anchorage   | 25 | — | 33,8 | — | 75   | — | — |
| Wire clamped by anchorage   | 25 | — | 34,1 | — | 75   | — | — |
| Mounting surface  | 25 | — | 27,5 | — | 90   | — | — |
| Lighted object(10cm)  | 25 | — | 26,2 | — | 90   | — | — |
| Supplementary information: —  |    |   |      |   |      |   |   |

|                |  |     |
|----------------|--|-----|
| <b>ANNEX 3</b> | <b>Screw terminals (part of the luminaire)</b> | N/A |
| <b>(14)</b>    | <b>SCREW TERMINALS</b>                         | N/A |

|                |  |     |
|----------------|--|-----|
| <b>ANNEX 4</b> | <b>Screwless terminals (part of the luminaire)</b> | N/A |
| <b>(15)</b>    | <b>SCREWLESS TERMINALS</b>                         | N/A |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

CENELEC COMMON MODIFICATIONS of IEC 60598-1: 2014+A1:2017

| CENELEC COMMON MODIFICATIONS (EN) |  |  | P   |
|-----------------------------------|--|--|-----|
| <b>(3)</b>                        | <b>MARKING</b>   |  | N/A |
| (3.3.101)                         | Adequate warning on the package  |  | N/A |
| <b>(4)</b>                        | <b>Construction</b>  |  | N/A |
| (4.11.6)                          | The test voltage however being reduced to 1500 V   |  | N/A |
| <b>(5)</b>                        | <b>EXTERNAL AND INTERNAL WIRING</b>  |  | P   |
| (5.2.1)                           | Connecting leads   |  | N/A |
|                                   | - without a means for connection to the supply   |  | N/A |
|                                   | - terminal block specified   |  | N/A |
|                                   | - relevant information provided  |  | N/A |
|                                   | - compliance with 4.6, 4.7.1, 4.7.2, 4.10.1, 11.2, 12 and 13.2 of Part 1                           |  | N/A |
| (5.2.2)                           | Cables equal to EN 50525.  |  | P   |
|                                   | Replace table 5.1 – Supply cord  |  | N/A |
| <b>(12)</b>                       | <b>ENDURANCE TESTS AND THERMAL TESTS</b>   |  | N/A |
| (12.4.2c)                         | Thermal test (normal operation)<br>see footnote c to table 12.2 relating to unsleeved fixed wiring |  | N/A |

| <b>ZB</b> | <b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)</b>       |  | N/A |
|-----------|---|--|-----|
| (3.3)     | DK: power supply cords of class I luminaires with label |  | N/A |
| (4.5.1)   | DK: socket-outlets                                      |  | N/A |
| (5.2.1)   | CY, DK, FI, SE, GB: type of plug                        |  | N/A |

| <b>ZC</b> | <b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>   |  | N/A |
|-----------|---|--|-----|
| (4 & 5)   | FR: Shuttered socket-outlets 10/16A   |  | N/A |
|           | FR: Safety requirements for high buildings<br><br>(Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage)<br><br>Glow-wire test for outer parts of luminaires: |  | N/A |

| IEC 60598-2-2 |  |                 |         |
|---------------|--|-----------------|---------|
| Clause        | Requirement + Test   | Result - Remark | Verdict |
|               | - 850°C for luminaires in stairways and horizontal travel paths  |                 | N/A     |
|               | - 650°C for indoor luminaires                                    |                 | N/A     |
| (13.3)        | GB: Requirements according to United Kingdom Building Regulation |                 | N/A     |

|                |   |          |
|----------------|---|----------|
| <b>Annex 6</b> | <b>Additional requirements according to IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020; EN 60598-2-1: 1989 used in conjunction with EN 60598-1: 2015+A1: 2018</b> | <b>P</b> |
|----------------|---|----------|

|                |  |          |
|----------------|--|----------|
| <b>Annex 7</b> | <b>Additional requirements of IEC 62031:2018 and EN IEC 62031:2020</b> | <b>P</b> |
|----------------|--|----------|

| IEC/EN 62031   |   |                      |            |
|----------------|---|----------------------|------------|
| Clause         | Requirement + Test  | Result - Remark      | Verdict    |
| <b>13 (14)</b> | <b>FAULT CONDITIONS</b>   |                      | <b>N/A</b> |
| p              | When operated under fault conditions the controlgear:   |                      | N/A        |
|                | - does not emit flames or molten material   |                      | N/A        |
|                | - does not produce flammable gases  |                      | N/A        |
|                | - protection against accidental contact not impaired  |                      | N/A        |
|                | Thermally protected controlgear does not exceed the marked temperature value  |                      | N/A        |
|                | Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected | (see appended table) | N/A        |
| - (14.1)       | Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts) | (see appended table) | N/A        |
|                | Creepage distances on printed boards less than specified in clause 16 in Part 1 provided with coating according to IEC 60664-3                          |                      | N/A        |
| - (14.2)       | Short-circuit or interruption of semiconductor devices  | (see appended table) | N/A        |
| - (14.3)       | Short-circuit across insulation consisting of lacquer, enamel or textile  | (see appended table) | N/A        |
| - (14.4)       | Short-circuit across electrolytic capacitors  | (see appended table) | N/A        |
| - (14.5)       | After the tests has been carried out on three samples:  |                      | N/A        |
|                | The insulation resistance $\geq 1 \text{ M}\Omega$ .....  |                      | N/A        |
|                | No flammable gases  |                      | N/A        |
|                | No accessible parts have become live  |                      | N/A        |

| IEC 60598-2-2 |  |                 |          |
|---------------|--|-----------------|----------|
| Clause        | Requirement + Test   | Result - Remark | Verdict  |
|               | During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite |                 | N/A      |
| - (14.6)      | Relevant fault condition tests with high-power supply  |                 | N/A      |
| <b>13.2</b>   | <b>Overpower condition</b>   |                 | <b>P</b> |
|               | Module withstands overpower condition >15 min.   |                 | P        |
|               | Module with automatic protective device or power limiter, test performed 15 min. at limit.       |                 | N/A      |
|               | No fire, smoke or flammable gas is produced  |                 | P        |
|               | Molten material does not ignite tissue paper, spread below the module                            |                 | P        |
| <b>15</b>     | <b>CONSTRUCTION</b>  |                 | <b>P</b> |
|               | Wood, cotton, silk, paper and similar fibrous material not used as insulation                    |                 | P        |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

Annex 8: additional requirements of IEC 62471: 2006 and EN 62471: 2008

| IEC 62471: 2006                         |  |                  |                                     |                      |         |          |        |          |        |
|---|--|------------------|-------------------------------------|----------------------|---------|----------|--------|----------|--------|
| Table 6.1                               | Emission limits for risk groups of continuous wave lamps |                  |                                     |                      |         |          |        |          | P      |
| Risk                                    | Action spectrum  | Symbol           | Units                               | Emission Measurement |         |          |        |          |        |
|   |  |                  |                                     | Exempt               |         | Low risk |        | Mod risk |        |
|   |  |                  |                                     | Limit                | Result  | Limit    | Result | Limit    | Result |
| Actinic UV                              | S <sub>UV</sub> (λ)                                      | E <sub>s</sub>   | W•m <sup>-2</sup>                   | 0,001                | 6,7e-05 | 0,003    | -      | 0,03     | -      |
| Near UV                                 | -  | E <sub>UVA</sub> | W•m <sup>-2</sup>                   | 10                   | 3,1e-05 | 33       | -      | 100      | -      |
| Blue light                              | B(λ)   | L <sub>B</sub>   | W•m <sup>-2</sup> •sr <sup>-1</sup> | 100                  | 5,1e-01 | 10000    | -      | 4000000  | -      |
| Blue light, small source                | B(λ)   | E <sub>B</sub>   | W•m <sup>-2</sup>                   | 1,0*                 | 1,6e-01 | 1,0      | -      | 400      | -      |
| Retinal thermal                         | R(λ)   | L <sub>R</sub>   | W•m <sup>-2</sup> •sr <sup>-1</sup> | 28000/α              | 8,5e+0  | 28000/α  | -      | 71000/α  | -      |
| Retinal thermal, weak visual stimulus** | R(λ)   | L <sub>IR</sub>  | W•m <sup>-2</sup> •sr <sup>-1</sup> | 6000/α               | 3,4e-03 | 6000/α   | -      | 6000/α   | -      |
| IR radiation, eye                       | -  | E <sub>IR</sub>  | W•m <sup>-2</sup>                   | 100                  | 1,4e-03 | 570      | -      | 3200     | -      |

\* Small source defined as one with α < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.  
 \*\* Involves evaluation of non-GLS source

| EN 62471: 2008                          |   |                  |                                     |                              |         |          |        |          |        |
|---|---|------------------|-------------------------------------|------------------------------|---------|----------|--------|----------|--------|
| Table 6.1                               | Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) |                  |                                     |                              |         |          |        |          | P      |
| Risk                                    | Action spectrum   | Symbol           | Units                               | Emission Measurement         |         |          |        |          |        |
|   |   |                  |                                     | Exempt                       |         | Low risk |        | Mod risk |        |
|   |   |                  |                                     | Limit                        | Result  | Limit    | Result | Limit    | Result |
| Actinic UV                              | S <sub>UV</sub> (λ)   | E <sub>s</sub>   | W•m <sup>-2</sup>                   | 0,001                        | 6,7e-05 | -        | -      | -        | -      |
| Near UV                                 | -   | E <sub>UVA</sub> | W•m <sup>-2</sup>                   | 0,33                         | 3,1e-05 | -        | -      | -        | -      |
| Blue light                              | B(λ)  | L <sub>B</sub>   | W•m <sup>-2</sup> •sr <sup>-1</sup> | 100                          | 5,1e-01 | 10000    | -      | 4000000  | -      |
| Blue light, small source                | B(λ)  | E <sub>B</sub>   | W•m <sup>-2</sup>                   | 0,01*                        | 1,6e-01 | 1,0      | -      | 400      | -      |
| Retinal thermal                         | R(λ)  | L <sub>R</sub>   | W•m <sup>-2</sup> •sr <sup>-1</sup> | 28000/α                      | 8,5e+0  | 28000/α  | -      | 71000/α  | -      |
| Retinal thermal, weak visual stimulus** | R(λ)  | L <sub>IR</sub>  | W•m <sup>-2</sup> •sr <sup>-1</sup> | 545000<br>0,0017 ≤ α ≤ 0,011 |         |          | -      |          |        |

| IEC 60598-2-2 |                    |                 |         |
|---------------|--------------------|-----------------|---------|
| Clause        | Requirement + Test | Result - Remark | Verdict |

| EN 62471: 2008   |   |                 |                   |   |         |     |   |      |   |
|--|---|-----------------|-------------------|---|---------|-----|---|------|---|
| <b>Table 6.1</b>   | Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) |                 |                   |   |         |     |   |      | P |
|  |   |                 |                   | 6000/ $\alpha$<br>0,011 ≤ $\alpha$ ≤<br>0,1 | 3,4e-03 |     |   |      |   |
| IR radiation, eye  | -   | E <sub>IR</sub> | W•m <sup>-2</sup> | 100   | 1,4e-03 | 570 | - | 3200 | - |
| <p>* Small source defined as one with <math>\alpha &lt; 0,011</math> radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2<br/>           The applicable aperture diameters: see 4.2.1<br/>           The limitations for the angular subtenses: see 4.2.2<br/>           The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p> |   |                 |                   |   |         |     |   |      |   |

**IEC 60598-2-2**

Appendix 2: Product photos




Overall view for 2018.135 (provided remote control)



Overall view for 2018.135 (without 0~10 V dimmer lead or remote control)

**IEC 60598-2-2**

Appendix 2: Product photos

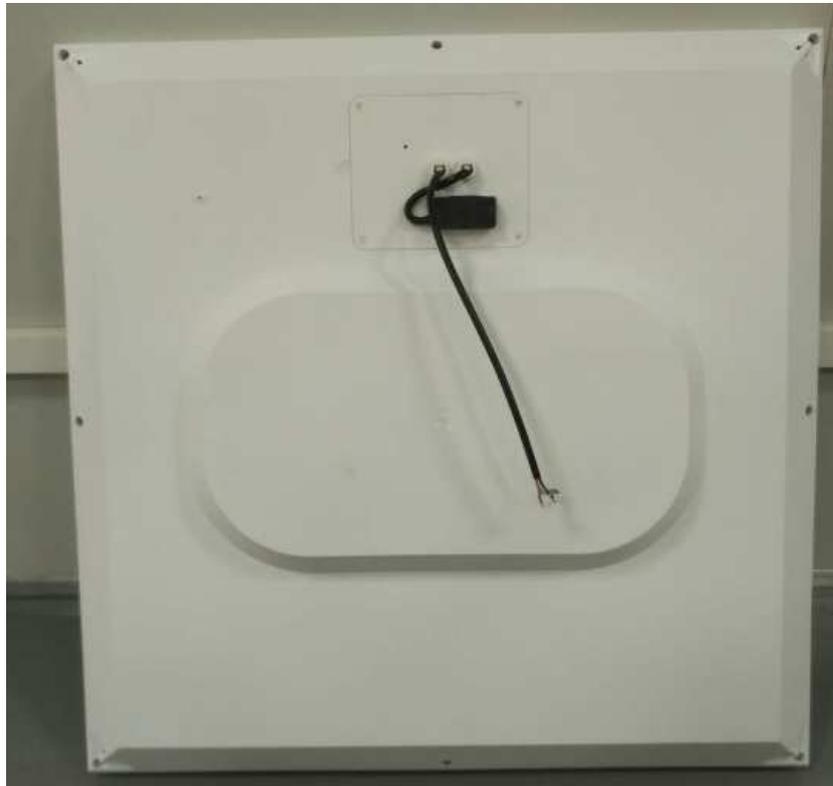

Overall view for 2018.135 (provided 0~10 V dimmer lead)



Overall view for 2018.126

**IEC 60598-2-2**

Appendix 2: Product photos



Terminal block



Ceiling mounting hole

**IEC 60598-2-2**

Appendix 2: Product photos




Internal view



Control panel

**IEC 60598-2-2**

Appendix 2: Product photos

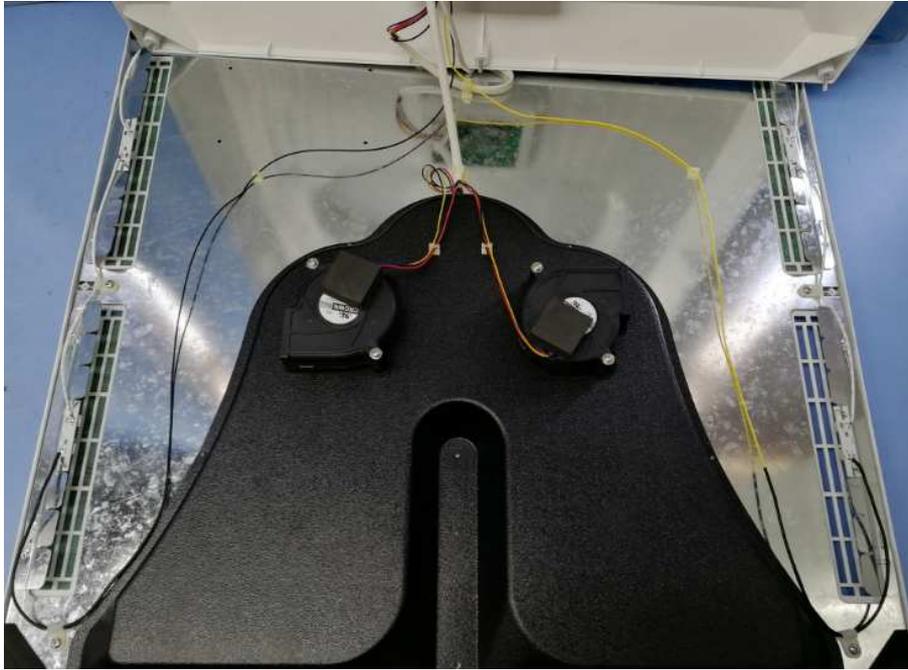


Fans




UV module

**IEC 60598-2-2**

Appendix 2: Product photos

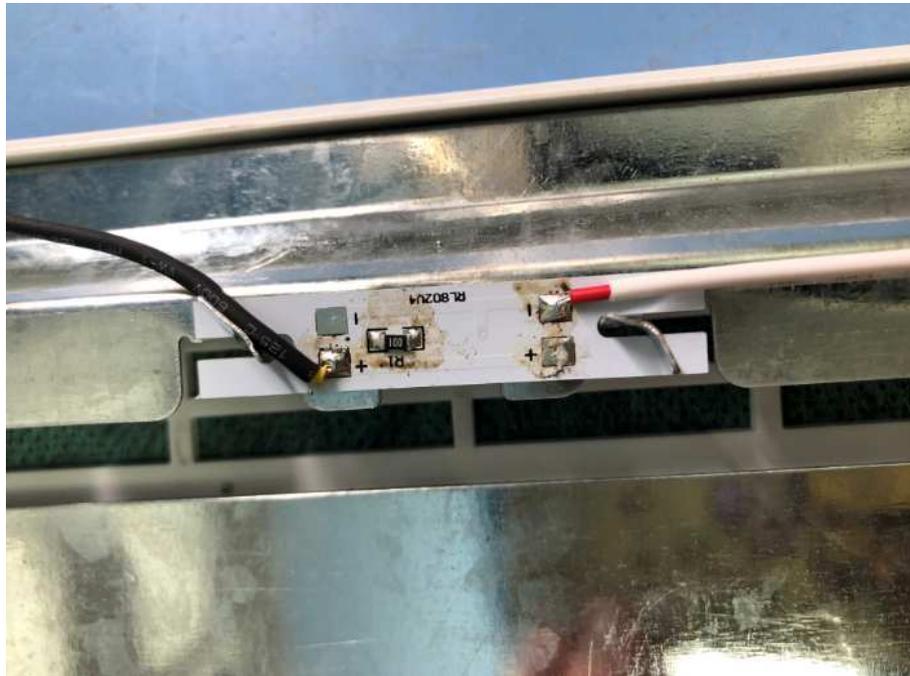

UV PCB bottom layer

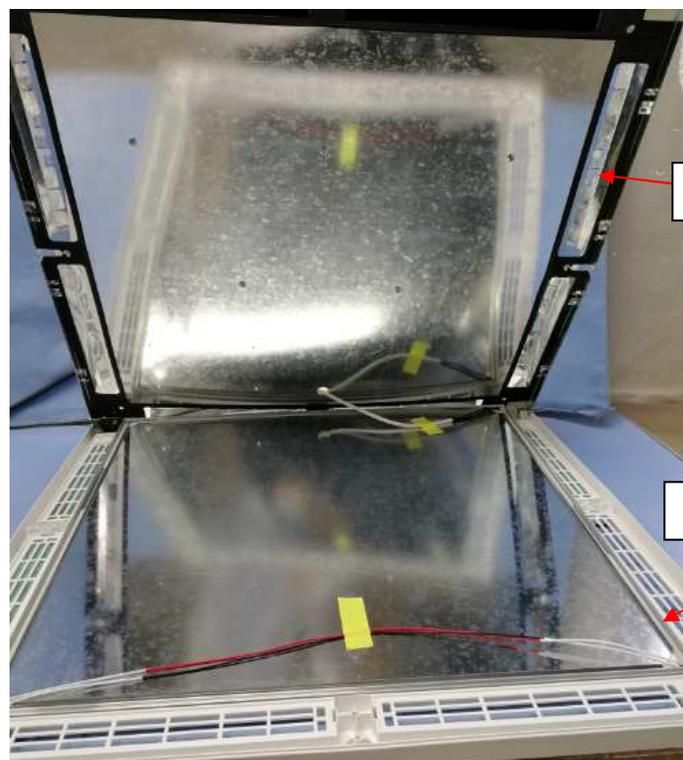

UV module over here

LED module over here

LED side internal view

**IEC 60598-2-2**

Appendix 2: Product photos




LED module



Mounting bracket for ceiling mounting

|                            |
|----------------------------|
| <b>IEC 60598-2-2</b>       |
| Appendix 2: Product photos |

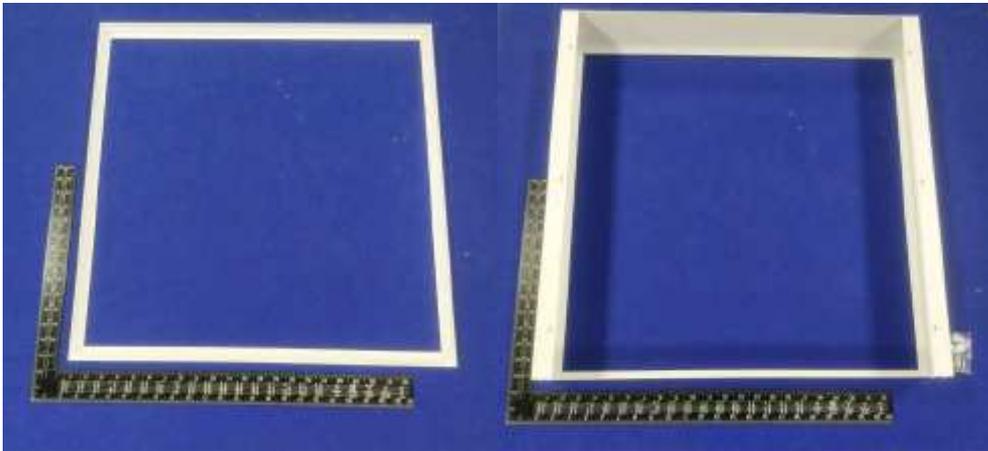

Mounting bracket for recessed mounting

\*\*\*\*\*End Of Report\*\*\*\*\*